
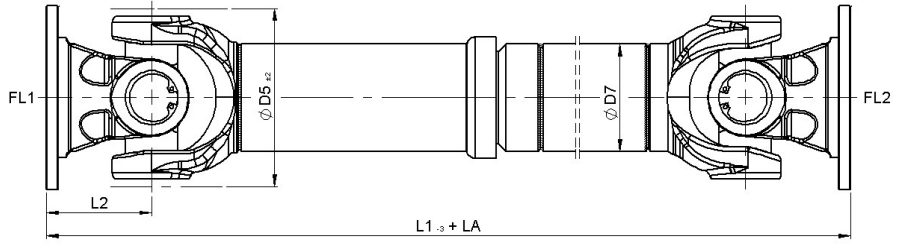
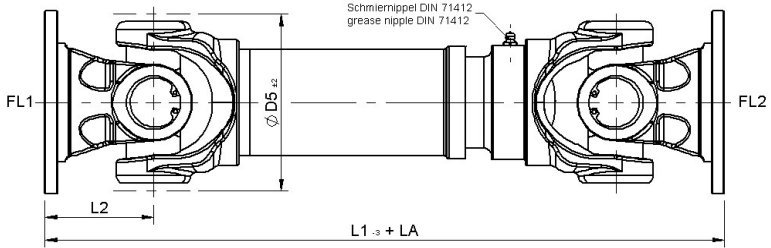
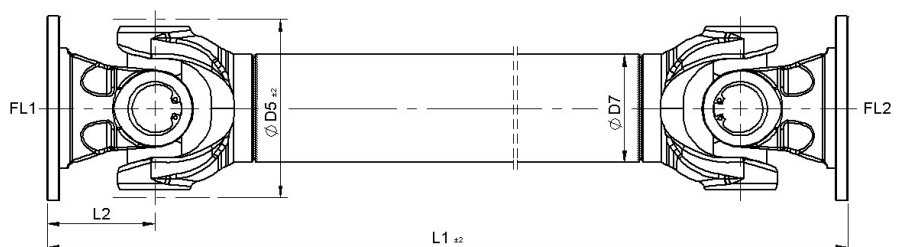


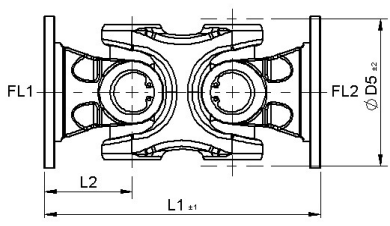

Eckdaten basic data (Sonderausführungen auf Anfrage)

Maximaldrehmoment <i>Maximum torque</i>	$M_{t_{max}}$ $M_{t_{max}}$	3000 Nm	Dauerwechsel Drehmoment <i>Alternating torque</i>	$M_{t_{dw}}$ $M_{t_{dw}}$	1700 Nm
Grenzdrehmoment <i>Limit torque</i>	$M_{t_{grenz}}$ $M_{t_{grenz}}$	4350 Nm	Drehzahl <i>Revolution</i>		1-3000 U/min (rpm)
Betriebstemperatur <i>Operational temperature</i>		-30°C - +120°C			
Rotationsdurchmesser <i>Diameter of rotation</i>		Ø 116 mm (D5)			
Rohrdurchmesser <i>Tube diameter</i>		Ø 70x3 mm (D7)			

GW	500-105		
L1	min.480 mm		
LA	140 mm		

GW	513-105		
L1	340-505 mm		
LA	45-130 mm		

GW	505-105		
L1	min. 285 mm		

GW	507-105		506-105	
L1	220 mm 200 mm		120 mm 140 mm	

